

ARA-DAC Weekly Analysis Result: 2408 (GFA)

Technical Report

GPS Week: 2408 (GFA)

<http://geolabpasaia.org/gnss/ARA-euref/>

ARA-DAC details:

Contact person: J. Zurutuza

Contact mail: geodesia@aranzadi.eus

Report generated on 2026/03/24 at 10:22:46



ARANZADI zientzia elkartea
sociedad de ciencias . society of sciences . société de sciences


Contents

1	Introduction	3
2	Map of Computed Sites	3
3	Main Computation Parameters	4
4	Estimated Parameters	4
5	Computed Coordinates	6
5.1	IGS20	6
5.2	ETRF2000 (ETRS89) Coordinates	6
5.3	ETRF2014 (ETRS89) Coordinates	7
5.4	ETRF2020 (ETRS89) Coordinates	7
6	Quality Control	8
6.1	Mean and Daily Repeatabilities	8
6.2	Datum verification	10
6.3	Adjustment Statistics	11
7	Equipment	11
7.1	Receiver List	11
7.2	Antennas	11
7.3	Eccentricities	12
8	Inconsistencies (logsheet-RINEX metadata)	12
9	References	14
10	Cumulative Time Series	15

1 Introduction

In may 2015 ARA (EUREF's acronym of the ARANZADI's Department of Applied Geodesy), kicks off as a EUREF's Operational Center. In July 2015, the Densification solutions ARA computes routinely in a weekly basis start being submitted to the EUREF's EPN Densification Project.

2 Map of Computed Sites

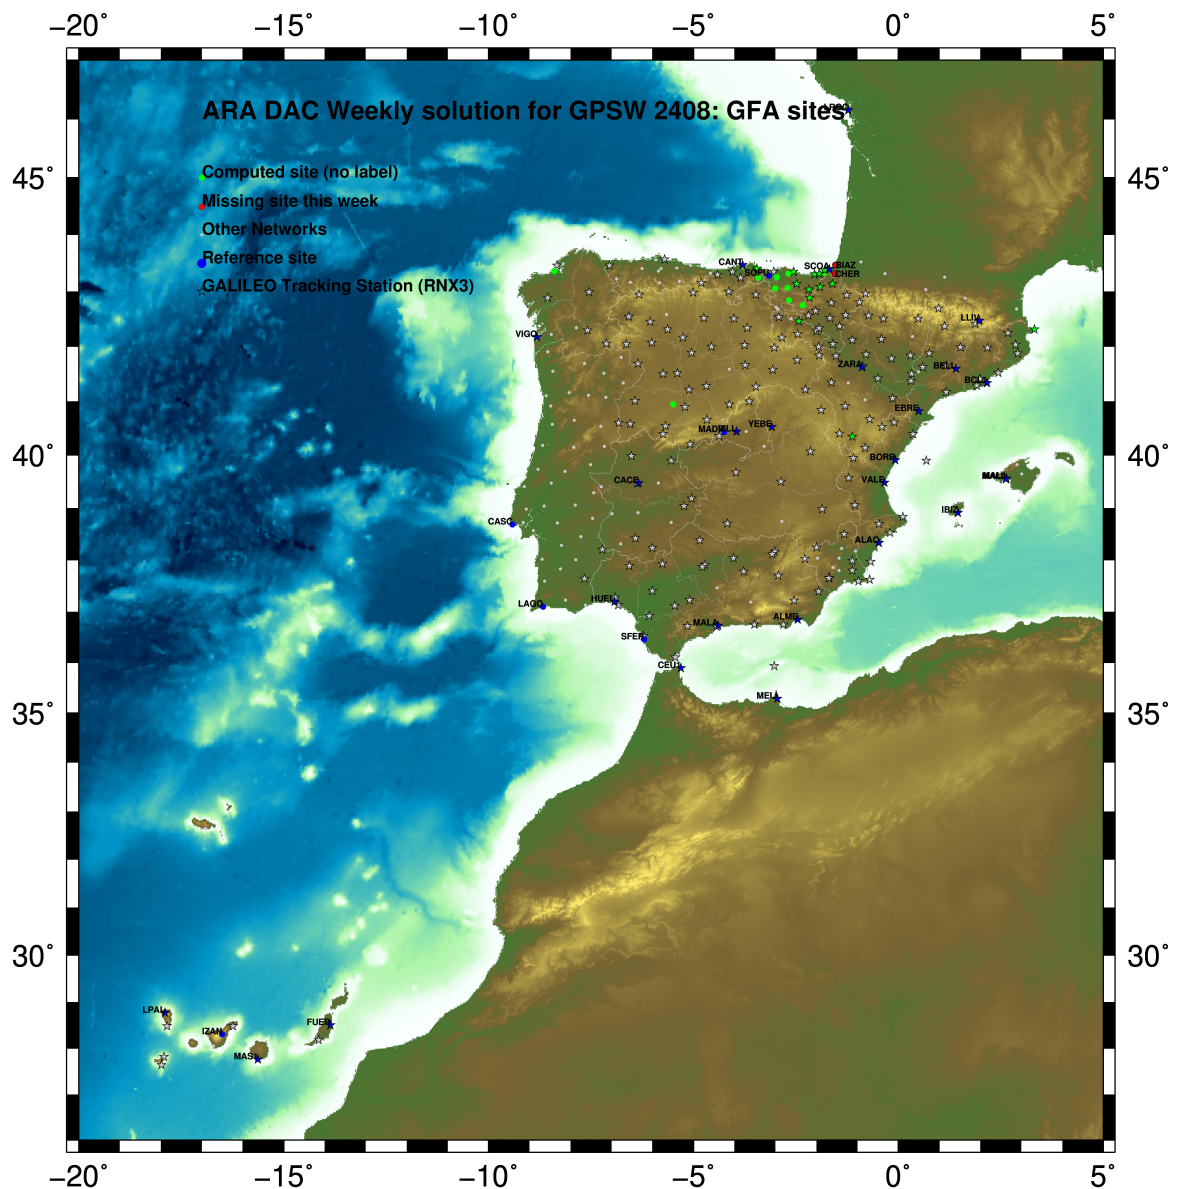

GM 2026 Mar 24 10:22:41

Fig.1: Computed Sites for GPS Week2408 (GFA)

3 Main Computation Parameters

The main parameters considered in the ARA analysis follow strictly the EPN recommendations.

- Preprocessing: Independent baselines are defined by the criterion of maximum common observations. Cycle slips are fixed with the MAUPRP program, analysing triple phase differences for each independent baseline. If MAUPRP does not fix all slips for one station, that station is edited out.
- Basic Observable : Carrier phase, L_1 and L_2 ; a priori sigma of single differences: 0.002 m.
 - sampling (for ambiguity resolution): 30 s
 - sampling (for final processing): 180 s
 - Systems: GPS+GLONASS observations are used (Galileo is used if available starting GPS week 1986)
- Modelled observable: Double differences of carrier phase using different combinations based on the distance.
- Ground antenna phase center calibrations: Group APCV used from the PCV_COD.I20 file and individual calibrations from EPNC_20.ATX. In case no calibration values of an antenna/radome pairs are not available for a certain GNSS system at some station, the observation of this/these GNSS/GNSSs are excluded from the analysis of that station.
- Reference sites: the latest IGS cumulative solution is used to align our solution to the latest IGS20 release, regularly updated and available at: IGS0OPSSNX_1994002_00U_00U_CRD.SNX.gz. Following the EUREF guidelines, no other individual calibrations are included in the analysis starting GPSW 2238 (IGS20); also applies to repro3 solutions, which are based on IGS20 standards.
- Troposphere:
 - minimum elevation is 3 deg.; elevation dependent weighting.
 - VMF3 mapping function. ZPD parameters are estimated using the VMF3 mapping function.
 - CHENHER gradient estimation model.
- Ionosphere: no a priori model, ionospheric effect almost removed by iono free combination.
- Ocean Loading: FES2014b (Scherneck).
- Atmospheric loading: not corrected, following the latest recommendations for IGS20 products.
- Tidal displacements:
 - Mean pole model : IERS2010_v1.2.0
 - Subdaily pole model: DESAI2016
 - Nutation model : IAU2000R06

4 Estimated Parameters

- Adjustment: Least Squares
- Rejection Criteria: $3 \times \text{rms}$ of single differences, in the weekly combination of daily normal equations (ADDNEQ)
- Station coordinates: minimum constraints (MC) to IGS sites (only translations).
- Troposphere: 3 deg. After having obtained coordinates valid for the entire week, tropospheric zenith delay is solved at each site at intervals of 1 hour throughout the week, holding the coordinates constrained at the weekly values.

- Ionospheric: second and third "High Order Ionosphere (HOI)" corrections used, using CODE files, to improve Ambiguity Resolution.
- Satellite clock bias: not estimated because are eliminated by double differencing the phase data.
- Receiver clock bias: not estimated because are eliminated by double differencing the phase data.
- Orbits and ERPs: CODE's orbits and ERP for both rapid and final solutions. DE421 planetary ephemeris and JGM3 Earth geopotential model is used.
- Ambiguity: an advanced ambiguity resolution (AR) scheme is included:
 - Code-Based Widelane (WL) and Narrow Line (NR) AR for baselines shorter than 6000km, a Melbourne-Wuebbena wide-lane and narrow-lane AR is computed.
 - Phase-Based Widelane (L_5) AR for baselines shorter than 200km, the code-based wide-lane AR is replaced by a phase-only wide-lane with a subsequent narrow-lane AR.
 - Quasi-Ionosphere-Free (QIF) AR for the remaining real-valued ambiguities for baselines shorter than 2000km.
 - Direct L_1/L_2 AR for baselines shorter than 20km
- AR Verification: Each baseline is processed by introducing the resolved integer ambiguities and checking the residuals. If there is any problem, the ambiguities are re-initialized.

5 Computed Coordinates

In this section the adjusted coordinates are summarized. Note that the sites with an A flag are the computed ones, whereas sites flagged as W (IGS cumulative solution) are the ones used in the Minimal Constraints condition.

5.1 IGS20

The Reference Frame considered in this section is the IGS20 (IGS cumulative solution), mapped from 2015.0 to the observation epoch.

```

ARA FINAL WEEKLY COMBINATION: FINAL ORBITS                24-MAR-26 08:52
-----
LOCAL GEODETIC DATUM: IGS20                EPOCH: 2026-03-04 11:59:45
-----
NUM STATION NAME      X (M)      Y (M)      Z (M)  FLAG  SYSTEM
111 ACRD 13434M001    4594489.46789  -678367.23082  4357066.33429  A  G
39 ALDA 19383M001    4687280.09050  -190876.43403  4308107.03842  A  GR
50 ALSA 19419M001    4677250.76592  -176770.26469  4319079.95696  A  GRE
53 AMUR 19388M001    4661499.38027  -244591.12809  4332269.96202  A  GR
101 BIDA 00000M000    4644177.74767  -145778.19154  4354832.55864  A  GR
113 BRZR 19387M001    4662220.91957  -220769.77038  4333309.51503  A  GR
573 CACE 13447M001    4899866.44381  -544566.90445  4033770.28831  W  GRE
592 CANT 13438M001    4625924.24740  -307096.10651  4365771.63822  W  GRE
908 CREU 13432M001    4715420.05276  273178.18934  4271946.92220  A  GRE
135 EBRE 13410M001    4833519.91802  41537.52359  4147461.80239  W  GRE
180 ELGE 19353S001    4657557.32554  -202241.34072  4338991.96776  A  GRE
182 EMAZ 17001M001    4645924.13823  -276949.74038  4347759.64585  A  GR
209 GERN 19389M001    4642811.24891  -217222.79508  4353278.95464  A  GR
257 HOND 15012M002    4640529.24629  -145675.85602  4358781.83639  A  GRE
235 IGEL 19352S001    4645951.35048  -165574.37360  4352550.50242  A  GRE
240 ISPS 19484M001    4640596.40935  -206963.64999  4356391.99700  A  GRE
245 KAST 19499M001    4646949.00462  -240747.13666  4348015.07045  A  GR
252 LARE 19440M001    4632831.88681  -279026.01503  4360314.50668  A  GRE
256 LAZK 19354S001    4666098.27223  -178186.06325  4330463.74881  A  GRE
261 LEIT 19428M001    4663520.86310  -155858.58898  4334519.96519  A  GRE
334 ORDN 19427M001    4659695.70948  -130864.60716  4339948.96602  A  GRE
345 PAS2 19351S001    4644908.98993  -156644.93947  4353623.15688  A  GRE
493 PASA 19351S001    4644908.98964  -156644.93966  4353623.15655  A  GRE
553 RID1 13448M002    4708446.75838  -199490.15251  4284089.81471  A  GRE
558 SALA 13469M001    4803054.41946  -462130.93991  4158379.15675  A  GR
526 SCDA 10088M002    4639940.43392  -136224.81427  4359552.50102  W  GRE
715 SOPU 19386M001    4643997.83661  -255913.77837  4350063.21719  W  GR
443 TERU 13487M001    4867391.25080  -95523.21328  4108341.76547  A  GRE
493 VITO 19385M001    4679397.63184  -218436.37461  4314898.44967  A  GR
616 YEBE 13420M001    4848724.49972  -261631.79710  4123094.40919  W  GRE
655 ZARA 13462M001    4773803.09659  -73505.85617  4215454.17512  W  GRE
    
```

5.2 ETRF2000 (ETRS89) Coordinates

European Terrestrial Reference System, 1989 (ETRS89) is realized by ETRF2000 (Boucher and Altamimi, 2011) and (Altamimi, 2017).

```

CONVERT TO ETRF2000                24-MAR-26 08:52
-----
LOCAL GEODETIC DATUM: ETRF2000                EPOCH: 2026-03-04 11:59:45
-----
NUM STATION NAME      X (M)      Y (M)      Z (M)  FLAG  SYSTEM
111 ACRD 13434M001    4594489.82673  -678367.90078  4357065.83262  A  A
39 ALDA 19383M001    4687280.51492  -190877.11482  4308106.53550  A  A
50 ALSA 19419M001    4677251.19329  -176770.94416  4319079.45417  A  A
53 AMUR 19388M001    4661499.79907  -244591.80574  4332269.46068  A  A
101 BIDA 00000M000    4644178.18250  -145778.86670  4354832.06035  A  A
113 BRZR 19387M001    4662221.34186  -220770.44807  4333309.01398  A  A
573 CACE 13447M001    4899866.79426  -544567.61281  4033769.76050  W  W
592 CANT 13438M001    4625924.66011  -307096.77979  4365771.13922  W  W
908 CREU 13432M001    4715420.54032  273177.50667  4271946.42344  A  A
135 EBRE 13410M001    4833520.36194  41536.82508  4147461.28939  W  W
180 ELGE 19353S001    4657557.75096  -202242.01776  4338991.46741  A  A
182 EMAZ 17001M001    4645924.55372  -276950.41615  4347759.14546  A  A
209 GERN 19389M001    4642811.67341  -217223.47027  4353278.45542  A  A
257 HOND 15012M002    4640529.68148  -145676.53072  4358781.33844  A  A
235 IGEL 19352S001    4645951.78229  -165575.04905  4352550.00367  A  A
240 ISPS 19484M001    4640596.83558  -206964.32488  4356391.49814  A  A
245 KAST 19499M001    4646949.42531  -240747.81245  4348014.57050  A  A
252 LARE 19440M001    4632832.30307  -279026.68912  4360314.00646  A  A
256 LAZK 19354S001    4666098.70036  -178186.74130  4330463.24802  A  A
261 LEIT 19428M001    4663521.29477  -155859.26664  4334519.46497  A  A
334 ORDN 19427M001    4659696.14509  -130865.28426  4339948.46652  A  A
345 PAS2 19351S001    4644909.42211  -156645.61476  4353622.65836  A  A
493 PASA 19351S001    4644909.42182  -156645.61495  4353622.65803  A  A
553 RID1 13448M002    4708447.17952  -199490.83600  4284089.30971  A  A
558 SALA 13469M001    4803054.79234  -462131.63598  4158378.63913  A  A
526 SCDA 10088M002    4639940.87052  -136225.48886  4359552.00326  W  W
715 SOPU 19386M001    4643998.25530  -255914.45382  4350062.71729  W  W
443 TERU 13487M001    4867391.67182  -95523.91653  4108341.24734  A  A
493 VITO 19385M001    4679398.05290  -218437.05447  4314897.94707  A  A
616 YEBE 13420M001    4848724.89827  -261632.49848  4123093.89034  W  W
655 ZARA 13462M001    4773803.52988  -73506.54755  4215453.66595  W  W
    
```

5.3 ETRF2014 (ETRS89) Coordinates

European Terrestrial Reference System, 1989 (ETRS89) is realized by ETRF2014 (Boucher and Altamimi, 2011) and (Altamimi, 2017).

CONVERT TO ETRF2014 24-MAR-26 08:52

LOCAL GEODETIC DATUM: ETRF2014 EPOCH: 2026-03-04 11:59:45

NUM	STATION NAME	X (M)	Y (M)	Z (M)	FLAG	SYSTEM
111	ACDR 13434M001	4594489.78738	-678367.93687	4357065.88602	A	
39	ALDA 19383M001	4687280.47292	-190877.15242	4308106.58876	A	
50	ALSA 19419M001	4677251.15135	-176770.98186	4319079.50747	A	
53	AMUR 19388M001	4661499.75756	-244591.84325	4332269.51400	A	
101	BIDA 00000M000	4644178.14083	-145778.90468	4354832.11378	A	
113	BRZR 19387M001	4662221.30026	-220770.48566	4333309.06730	A	
573	CACE 13447M001	4899866.75080	-544567.64798	4033769.81301	W	
592	CANT 13438M001	4625924.61923	-307096.81722	4365771.19263	W	
908	CREU 13432M001	4715420.49610	273177.46741	4271946.47697	A	
135	EBRE 13410M001	4833520.31725	41536.78727	4147461.34237	W	
180	ELGE 19353S001	4657557.70935	-202242.05545	4338991.52076	A	
182	EMAZ 17001M001	4645924.51251	-276950.45360	4347759.19881	A	
209	GERN 19389M001	4642811.63201	-217223.50798	4353278.50882	A	
257	HOND 15012M002	4640529.63985	-145676.56871	4358781.39188	A	
235	IGEL 19352S001	4645951.74068	-165575.08694	4352550.05709	A	
240	ISPS 19484M001	4640596.79417	-206964.36263	4356391.55154	A	
245	KAST 19499M001	4646949.38395	-240747.85004	4348014.62387	A	
252	LARE 19440M001	4632832.26201	-279026.72662	4360314.05986	A	
256	LAZK 19354S001	4666098.65856	-178186.77904	4330463.30136	A	
261	LEIT 19428M001	4663521.25291	-155859.30449	4334519.51833	A	
334	ORON 19427M001	4659696.10319	-130865.32222	4338948.51991	A	
345	PAS2 19351S001	4644909.38047	-156645.65269	4353622.71178	A	
493	PASA 19351S001	4644909.38018	-156645.65288	4353622.71145	A	
553	RI01 13448M002	4708447.13729	-199490.87346	4284089.36290	A	
558	SALA 13469M001	4803054.74986	-462131.67195	4158378.69192	A	
526	SC0A 10088M002	4639940.82886	-136225.52690	4359552.05671	W	
715	SOPU 19386M001	4643998.21404	-255914.49136	4350062.77066	W	
443	TERU 13487M001	4867391.62726	-95523.95364	4108341.30012	A	
493	VITO 19385M001	4679398.01109	-218437.09199	4314898.00034	A	
616	YEBE 13420M001	4848724.85455	-261632.53503	4123093.94308	W	
655	ZARA 13462M001	4773803.48639	-73506.58519	4215453.71902	W	

5.4 ETRF2020 (ETRS89) Coordinates

European Terrestrial Reference System, 1989 (ETRS89) is realized by ETRF2020 (Boucher and Altamimi, 2011) and (Altamimi, 2017).

CONVERT TO ETRF2020 24-MAR-26 08:52

LOCAL GEODETIC DATUM: ETRF2020 EPOCH: 2026-03-04 11:59:45

NUM	STATION NAME	X (M)	Y (M)	Z (M)	FLAG	SYSTEM
111	ACDR 13434M001	4594489.78337	-678367.92185	4357065.89403	A	
39	ALDA 19383M001	4687280.46755	-190877.13689	4308106.59704	A	
50	ALSA 19419M001	4677251.14591	-176770.96636	4319079.51574	A	
53	AMUR 19388M001	4661499.75229	-244591.82783	4332269.52222	A	
101	BIDA 00000M000	4644178.13521	-145778.88928	4354832.12199	A	
113	BRZR 19387M001	4662221.29492	-220770.47023	4333309.07553	A	
573	CACE 13447M001	4899866.74721	-544567.63191	4033769.82156	W	
592	CANT 13438M001	4625924.61408	-307096.80194	4365771.20078	W	
908	CREU 13432M001	4715420.48941	273177.48322	4271946.48538	A	
135	EBRE 13410M001	4833520.31159	41536.80337	4147461.35093	W	
180	ELGE 19353S001	4657557.70394	-202242.04003	4338991.52898	A	
182	EMAZ 17001M001	4645924.50731	-276950.43825	4347759.20700	A	
209	GERN 19389M001	4642811.62661	-217223.49261	4353278.51701	A	
257	HOND 15012M002	4640529.63422	-145676.55332	4358781.40008	A	
235	IGEL 19352S001	4645951.73512	-165575.07154	4352550.06530	A	
240	ISPS 19484M001	4640596.78874	-206964.34727	4356391.55974	A	
245	KAST 19499M001	4646949.37864	-240747.83467	4348014.63207	A	
252	LARE 19440M001	4632832.25678	-279026.71131	4360314.06803	A	
256	LAZK 19354S001	4666098.65310	-178186.76359	4330463.30961	A	
261	LEIT 19428M001	4663521.24738	-155859.28903	4334519.52657	A	
334	ORON 19427M001	4659696.09756	-130865.30676	4338948.52815	A	
345	PAS2 19351S001	4644909.37489	-156645.63729	4353622.71999	A	
493	PASA 19351S001	4644909.37460	-156645.63748	4353622.71966	A	
553	RI01 13448M002	4708447.13202	-199490.85787	4284089.37122	A	
558	SALA 13469M001	4803054.74570	-462131.65616	4158378.70034	A	
526	SC0A 10088M002	4639940.82320	-136225.51151	4359552.06491	W	
715	SOPU 19386M001	4643998.20876	-255914.47601	4350062.77885	W	
443	TERU 13487M001	4867391.62211	-95523.93749	4108341.30872	A	
493	VITO 19385M001	4679398.00579	-218437.07651	4314898.00860	A	
616	YEBE 13420M001	4848724.84987	-261632.51901	4123093.95161	W	
655	ZARA 13462M001	4773803.48091	-73506.56934	4215453.72747	W	

6 Quality Control

6.1 Mean and Daily Repeatabilities

In this section, the mean and daily repeatabilities of the sites are shown. Repeatabilities refer to the IGS20 solution and are given with respect to the Local frame (North-East-Up).

GFA FINAL WEEKLY COMBINATION: FINAL ORBITS 24-MAR-26 08:52

Station	#Days	Weekday 0123456	Repeatability (mm)		
			N	E	U
ACOR 13434M001	7	XXXXXX	0.92	0.67	4.65
ALDA 19383M001	7	XXXXXX	2.73	1.68	4.71
ALSA 19419M001	7	XXXXXX	2.57	1.08	7.07
AMUR 19388M001	7	XXXXXX	1.43	1.44	3.75
BIDA 00000M000	7	XXXXXX	1.61	0.78	3.23
BRZR 19387M001	7	XXXXXX	1.54	1.29	7.94
CACE 13447M001	7	XXXXXX	0.24	0.60	3.28
CANT 13438M001	7	XXXXXX	0.79	0.33	1.71
CREU 13432M001	7	XXXXXX	0.74	0.43	5.03
EBRE 13410M001	7	XXXXXX	1.02	0.86	7.18
ELGE 19353S001	7	XXXXXX	0.94	1.46	4.42
EMAZ 17001M001	7	XXXXXX	2.00	0.63	6.33
GERN 19389M001	7	XXXXXX	1.93	1.29	4.22
HOND 15012M002	7	XXXXXX	1.15	0.86	3.36
IGEL 19352S001	7	XXXXXX	2.36	0.71	3.21
ISPS 19484M001	7	XXXXXX	0.74	1.36	4.05
KAST 19499M001	5	X IXX X	1.41	0.83	9.23
LARE 19440M001	7	XXXXXX	2.09	0.53	2.69
LAZK 19354S001	7	XXXXXX	4.03	1.56	7.37
LEIT 19428M001	7	XXXXXX	1.26	1.33	4.08
ORON 19427M001	7	XXXXXX	1.02	0.92	2.93
PAS2 19351S001	4	X IXX	0.84	0.72	2.39
PASA 19351S001	7	XXXXXX	0.83	0.55	2.36
RI01 13448M002	7	XXXXXX	1.07	0.40	3.16
SALA 13469M001	6	X IXXXX	0.52	0.18	2.75
SCOA 10088M002	7	XXXXXX	1.61	1.82	1.75
SOPU 19386M001	7	XXXXXX	0.96	0.61	8.11
TERU 13487M001	7	XXXXXX	2.23	0.58	5.83
VITO 19385M001	7	XXXXXX	0.83	0.56	3.53
YEBE 13420M001	7	XXXXXX	0.63	0.20	2.72
ZARA 13462M001	7	XXXXXX	0.71	0.79	4.06

Comparison of individual solutions:

ACOR 13434M001	N	0.92	-0.10	0.47	0.62	0.15	-1.52	0.44	-1.40
ACOR 13434M001	E	0.67	0.52	0.49	0.27	-0.97	0.51	-0.25	-0.93
ACOR 13434M001	U	4.65	1.15	-0.80	0.67	-1.63	1.78	2.33	-10.77
ALDA 19383M001	N	2.73	-0.09	-4.20	-0.43	4.12	1.29	2.90	-0.05
ALDA 19383M001	E	1.68	-1.49	3.69	0.02	0.41	-0.54	-0.01	-0.78
ALDA 19383M001	U	4.71	-1.81	-2.53	-1.83	0.48	3.72	5.96	8.40
ALSA 19419M001	N	2.57	-1.45	1.57	-4.32	3.01	-0.51	2.59	0.58
ALSA 19419M001	E	1.08	1.08	1.91	0.16	-1.12	0.04	-0.09	-0.95
ALSA 19419M001	U	7.07	-10.01	10.63	3.19	4.98	4.66	-4.47	3.16
AMUR 19388M001	N	1.43	-0.96	-1.60	1.01	0.49	0.78	2.60	-0.33
AMUR 19388M001	E	1.44	0.27	-3.02	0.73	0.37	-0.60	1.50	-0.03
AMUR 19388M001	U	3.75	-3.73	0.98	-2.20	0.36	0.72	6.62	4.50
BIDA 00000M000	N	1.61	0.05	-2.20	0.88	2.78	0.99	0.44	-0.98
BIDA 00000M000	E	0.78	-0.01	0.71	-0.51	0.52	-0.84	0.52	-1.29
BIDA 00000M000	U	3.23	-0.06	-4.42	3.27	-0.62	4.37	3.41	1.09
BRZR 19387M001	N	1.54	2.67	-0.73	1.43	1.19	-0.03	-1.40	-1.06
BRZR 19387M001	E	1.29	1.04	-2.45	0.13	-1.33	0.44	0.92	0.39
BRZR 19387M001	U	7.94	-2.05	-10.79	-3.68	-3.22	6.96	9.97	9.27
CACE 13447M001	N	0.24	-0.11	0.02	0.29	-0.15	-0.41	-0.21	-0.09
CACE 13447M001	E	0.60	-0.12	0.65	-0.23	-1.11	-0.56	-0.23	0.31
CACE 13447M001	U	3.28	0.08	-6.23	2.17	-0.62	0.27	3.29	-3.13
CANT 13438M001	N	0.79	0.28	1.22	0.07	1.04	0.44	-0.04	-0.95
CANT 13438M001	E	0.33	0.01	-0.03	-0.07	-0.44	-0.57	0.17	-0.32
CANT 13438M001	U	1.71	-1.12	1.44	1.07	3.09	1.38	0.71	-1.06
CREU 13432M001	N	0.74	-0.53	0.67	0.02	1.19	1.01	0.22	0.19
CREU 13432M001	E	0.43	-0.65	0.13	-0.09	0.35	0.13	0.55	-0.47
CREU 13432M001	U	5.03	0.43	-6.43	3.48	5.65	6.78	1.19	4.33
EBRE 13410M001	N	1.02	0.83	-0.57	0.58	2.15	0.33	-0.15	-0.33
EBRE 13410M001	E	0.86	-0.61	1.09	-0.16	-1.20	0.21	1.16	-0.28
EBRE 13410M001	U	7.18	-3.05	-1.17	0.31	13.02	8.52	-6.27	4.11
ELGE 19353S001	N	0.94	-0.99	0.98	0.76	1.04	0.49	0.65	-0.99
ELGE 19353S001	E	1.46	-0.98	0.75	-0.73	-2.15	-0.43	2.42	0.24
ELGE 19353S001	U	4.42	-2.16	-4.62	-3.00	3.82	1.12	6.62	4.76
EMAZ 17001M001	N	2.00	1.04	2.96	0.90	1.46	-0.03	-1.04	-3.18
EMAZ 17001M001	E	0.63	0.38	-0.34	-0.14	-0.80	-0.67	0.62	-0.78
EMAZ 17001M001	U	6.33	-5.57	-2.35	-3.79	-2.78	1.19	12.40	5.16
GERN 19389M001	N	1.93	-0.25	2.80	0.45	2.06	1.14	-2.29	-1.83
GERN 19389M001	E	1.29	0.74	1.28	0.25	0.03	0.55	-2.51	-1.07
GERN 19389M001	U	4.22	-2.97	-6.24	1.16	2.06	5.22	3.50	3.73
HOND 15012M002	N	1.15	-0.01	0.13	0.86	2.24	0.35	-0.12	-1.40
HOND 15012M002	E	0.86	0.86	-1.54	0.21	-0.69	-0.28	0.80	-0.19
HOND 15012M002	U	3.36	-0.53	-2.61	0.50	2.43	7.35	0.21	-0.68
IGEL 19352S001	N	2.36	1.59	4.71	-0.19	0.04	0.18	-1.74	-2.34
IGEL 19352S001	E	0.71	-0.40	-1.01	-0.37	0.05	-0.47	1.23	0.02
IGEL 19352S001	U	3.21	-0.04	-4.02	1.71	5.88	2.81	0.57	0.09
ISPS 19484M001	N	0.74	1.14	0.73	0.57	0.67	-0.15	-0.30	-0.74
ISPS 19484M001	E	1.36	-0.00	-2.72	0.02	-0.03	0.09	1.91	-0.05
ISPS 19484M001	U	4.05	-2.41	-6.18	1.47	2.69	3.30	4.73	3.46
KAST 19499M001	N	1.41	0.11		-0.80	-1.44	1.82		1.37
KAST 19499M001	E	0.83	-0.89		0.21	1.02	-0.69		-0.64
KAST 19499M001	U	9.23	-8.60		-4.29	-1.77	5.68		14.60
LARE 19440M001	N	2.09	3.88	2.05	-1.31	0.84	-1.08	-0.51	-1.78
LARE 19440M001	E	0.53	-0.27	0.26	0.16	-0.08	-1.16	-0.28	-0.27
LARE 19440M001	U	2.69	-0.82	-1.30	-0.40	-1.45	-0.28	4.09	4.70
LAZK 19354S001	N	4.03	-0.33	-8.64	2.86	1.12	1.35	2.86	1.88
LAZK 19354S001	E	1.56	-0.02	-1.84	0.98	-2.19	1.29	1.66	1.03
LAZK 19354S001	U	7.37	-5.95	5.55	11.31	8.46	2.81	-7.21	-0.31
LEIT 19428M001	N	1.26	-1.04	2.32	-0.21	0.88	0.77	0.19	-1.25
LEIT 19428M001	E	1.33	-0.04	2.28	0.96	-0.84	-0.37	-0.75	-1.74
LEIT 19428M001	U	4.08	-0.77	-4.58	1.67	-1.10	4.21	3.57	6.63

ORDN	19427M001	N	1.02	-0.71	1.21	-0.49	1.84	-0.18	-0.09	-0.75
ORDN	19427M001	E	0.92	0.39	-1.66	0.82	1.00	0.03	0.57	0.40
ORDN	19427M001	U	2.93	-0.15	1.61	0.81	4.23	5.30	-1.41	-0.26
PAS2	19351S001	N	0.84		-0.25		1.13	0.75	0.47	
PAS2	19351S001	E	0.72		0.65		-0.78	-0.50	0.51	
PAS2	19351S001	U	2.39		0.14		3.31	2.42	0.57	
PASA	19351S001	N	0.83	0.11	-0.20	0.31	1.44	0.63	0.70	-1.01
PASA	19351S001	E	0.55	0.06	0.09	-0.45	-0.49	0.14	0.65	-0.95
PASA	19351S001	U	2.36	-2.24	-0.14	3.00	2.61	3.41	-0.11	1.00
RID1	13448M002	N	1.07	0.18	0.33	0.02	1.65	0.87	0.12	-1.79
RID1	13448M002	E	0.40	0.12	0.25	0.62	0.03	0.16	0.32	-0.60
RID1	13448M002	U	3.16	-2.19	-1.09	2.63	3.10	2.24	1.81	5.40
SALA	13469M001	N	0.52	-0.14		0.10	-0.11	-0.74	0.65	-0.60
SALA	13469M001	E	0.18	-0.05		0.29	-0.24	-0.07	-0.12	-0.03
SALA	13469M001	U	2.75	-0.41		3.45	-2.74	-0.43	-0.33	-4.24
SCDA	10088M002	N	1.61	0.87	3.26	-1.37	0.85	0.07	-0.05	-1.26
SCDA	10088M002	E	1.82	-0.79	-2.86	-2.09	1.40	-0.33	1.94	0.95
SCDA	10088M002	U	1.75	1.18	1.25	1.77	2.07	0.87	-1.80	2.01
SOPU	19386M001	N	0.96	0.77	1.29	0.06	-0.51	0.35	1.27	-1.13
SOPU	19386M001	E	0.61	0.17	0.63	0.36	0.26	-0.92	-0.74	-0.46
SOPU	19386M001	U	8.11	1.41	-12.34	-2.81	-1.39	1.62	13.46	6.86
TERU	13487M001	N	2.23	-0.71	-0.27	0.00	-5.38	0.24	-0.45	0.10
TERU	13487M001	E	0.58	-0.09	0.21	1.00	0.70	-0.44	0.51	0.13
TERU	13487M001	U	5.83	-4.88	-4.25	-2.72	8.68	-7.75	1.64	4.12
VITO	19385M001	N	0.83	-0.16	1.48	0.79	-0.19	0.94	0.28	-0.55
VITO	19385M001	E	0.56	0.40	0.49	0.07	-0.92	0.14	0.76	0.22
VITO	19385M001	U	3.53	-2.71	1.95	3.31	2.32	4.74	-1.59	4.71
YEBE	13420M001	N	0.63	-0.41	0.74	0.55	-0.15	-0.84	0.53	-0.56
YEBE	13420M001	E	0.20	0.11	0.35	0.13	-0.21	-0.21	0.04	-0.09
YEBE	13420M001	U	2.72	-1.98	3.29	0.27	-1.98	0.73	1.72	-4.72
ZARA	13462M001	N	0.71	0.12	0.29	0.17	1.11	0.76	0.32	-0.98
ZARA	13462M001	E	0.79	0.62	0.03	0.30	0.04	0.31	1.20	-1.32
ZARA	13462M001	U	4.06	-0.72	-3.48	1.19	4.99	5.28	1.14	5.54

6.2 Datum verification

In this section, the datum verification is shown. A 3 parameter Helmert 3D (3 translations) is computed to the minimally constrained sites.

TRANSFORMATION IN EQUATORIAL SYSTEM (X, Y, Z):
RESIDUALS IN LOCAL SYSTEM (NORTH, EAST, UP)

LIST OF REMOVED STATIONS:

OUTLIER CRITERIA: 15.00 15.00 20.00

NUM	NAME	FLG	RESIDUALS IN MILLIMETERS		
2	ALAC 13433M001	I W	1.42	-2.08	3.58
3	ALME 13437M001	I W	-0.14	0.11	0.83
4	BCL1 19482M001	I W	-0.94	0.68	1.91
5	BELL 13431M001	I W	-0.27	1.08	1.49
6	BORR 13480M001	I W	-6.56	-0.97	-1.47
7	BRST 10004M004	I W	0.39	-3.00	3.29
8	CACE 13447M001	I W	1.64	0.18	3.23
9	CANT 13438M001	I W	2.15	0.01	-2.14
10	CASC 13909S001	I W	1.62	-1.25	6.21
11	CEU1 13449M002	I W	0.54	1.12	-4.76
13	EBRE 13410M001	I W	-3.26	1.62	-4.13
15	FLRS 131907M001	I W	-0.75	-0.62	-5.35
16	FUER 31330M001	I W	-2.01	-0.38	-2.10
18	HUEL 13451M001	I W	1.76	1.59	-4.67
19	IBIZ 13454S001	I W	-1.17	-0.10	1.31
20	IZAN 31309M002	I W	-1.77	-2.64	-5.92
21	LAGO 13903M001	I W	1.67	-0.67	4.56
22	LLIV 13436M001	I W	-2.26	1.68	3.59
23	LPAL 81701M001	I W	1.69	1.77	-7.71
24	LROC 10023M001	I W	0.65	-0.25	1.77
25	MADR 13407S012	I W	-1.28	1.16	-0.08
26	MAL1 13444M002	I W	2.57	-0.59	-11.57
27	MALA 13443M001	I W	2.30	1.24	10.58
28	MALL 13444M001	I W	-0.69	1.64	-3.70
29	MAS1 31303M002	I W	-3.12	-3.67	-3.04
30	MELI 19379M001	I W	0.20	1.22	0.40
31	PDEL 31906M004	I W	-2.92	-2.67	4.21
32	SCOA 10088M002	I W	0.48	-0.05	-13.73
33	SFER 13402M004	I W	-0.90	-4.20	10.96
34	SOPU 19386M001	I W	1.61	1.18	1.36
35	VALE 13439M001	I W	1.05	2.54	-3.00
36	VIGO 13450M001	I W	2.42	0.81	0.59
37	VILL 13406M001	I W	-1.03	-1.35	5.94
38	YEBE 13420M001	I W	0.02	-0.03	5.86
39	ZARA 13462M001	I W	0.08	1.56	-1.79
40	ZIMM 14001M004	I W	-0.42	0.62	6.45
RMS / COMPONENT			1.96	1.66	5.44
IQR			2.71	2.03	6.95
MEAN			-0.15	-0.08	0.08
MEDIAN			0.05	0.06	0.71
MIN			-6.56	-4.20	-13.73
MAX			2.57	2.54	10.96
OVERALL RMS/IQR/MAX(3D)			3.47	3.24	13.73
SCOA 10088M002	#SUM				
ALL	RMS / COMPONENT		1.96	1.66	5.44
ALL	IQR		2.71	2.03	6.95
ALL	MEAN		-0.15	-0.08	0.08
ALL	MEDIAN		0.05	0.06	0.71
ALL	MIN		-6.56	-4.20	-13.73
ALL	MAX		2.57	2.54	10.96
ALL	OVERALL RMS/IQR/MAX(3D)		3.47	3.24	13.73
SCOA 10088M002	#SUM_ALL				

NUMBER OF PARAMETERS : 3
NUMBER OF STATIONS : 36
NUMBER OF COORDINATES : 108
RMS OF TRANSFORMATION : 3.47 MM

PARAMETERS:

TRANSLATION IN X : -0.00 +- 0.58 MM
TRANSLATION IN Y : 0.00 +- 0.58 MM
TRANSLATION IN Z : 0.00 +- 0.58 MM

NUMBER OF ITERATIONS : 1

6.3 Adjustment Statistics

In this section, the summary of the global adjustment and not subnetworks are shown. Also, the Helmert parameters of the combined solution with respect to the daily solutions are shown.

```
* STATISTICAL PARAMETER----- VALUE(S)-----
NUMBER OF OBSERVATIONS          17838940
NUMBER OF UNKNOWNNS             183522
NUMBER OF DEGREES OF FREEDOM    17655418
PHASE MEASUREMENTS SIGMA        0.00100
SAMPLING INTERVAL (SECONDS)     180
VARIANCE FACTOR                  2.495974253211979
```

7 Equipment

7.1 Receiver List

Serial numbers not shown.

```
*SITE PT SOLN T DATA_START_ DATA_END_ DESCRIPTION----- S/N_ FIRMWARE____
ACOR A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
ALDA A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
ALSA A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
AMUR A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
BIDA A 1 P 26:06:00000 26:06:86370 LEICA GR10 -----
BRZR A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
CACE A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
CANT A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
CREU A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
EBRE A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
ELGE A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
EMAZ A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
GERN A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
HOND A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
IGEL A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
ISPS A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
KAST A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
LARE A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
LAZK A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
LEIT A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
ORON A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
PAS2 A 1 P 26:06:00000 26:06:86370 STONEX SC2200 -----
PASA A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
RI01 A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
SALA A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
SCDA A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
SOPU A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
TERU A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
VITO A 1 P 26:06:00000 26:06:86370 LEICA GR30 -----
YEBE A 1 P 26:06:00000 26:06:86370 LEICA GR50 -----
ZARA A 1 P 26:06:00000 26:06:86370 TRIMBLE NETR9 -----
```

7.2 Antennas

Serial number ONLY provided in case individual calibrations are used.

```
*SITE PT SOLN T DATA_START_ DATA_END_ DESCRIPTION----- S/N_ DAZI
ACOR A 1 P 26:06:00000 26:06:86370 LEIAT504 LEIS -----
ALDA A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
ALSA A 1 P 26:06:00000 26:06:86370 LEIAR10 NONE -----
AMUR A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
BIDA A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
BRZR A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
CACE A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
CANT A 1 P 26:06:00000 26:06:86370 LEIAR25_R4 LEIT -----
CREU A 1 P 26:06:00000 26:06:86370 LEIAR25_R4 NONE -----
EBRE A 1 P 26:06:00000 26:06:86370 LEIAR25_R4 NONE -----
ELGE A 1 P 26:06:00000 26:06:86370 LEIAR25_R4 LEIT -----
EMAZ A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
GERN A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
HOND A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
IGEL A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
ISPS A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
KAST A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
LARE A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
LAZK A 1 P 26:06:00000 26:06:86370 LEIAR25_R4 LEIT -----
LEIT A 1 P 26:06:00000 26:06:86370 LEIAR10 NONE -----
ORON A 1 P 26:06:00000 26:06:86370 LEIAR10 NONE -----
PAS2 A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
PASA A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
RI01 A 1 P 26:06:00000 26:06:86370 LEIAR25_R4 LEIT -----
SALA A 1 P 26:06:00000 26:06:86370 LEIAR25 NONE -----
SCDA A 1 P 26:06:00000 26:06:86370 TRM55971.00 NONE -----
SOPU A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
TERU A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
VITO A 1 P 26:06:00000 26:06:86370 LEIAS10 NONE -----
YEBE A 1 P 26:06:00000 26:06:86370 LEIAR20 LEIM -----
ZARA A 1 P 26:06:00000 26:06:86370 TRM29659.00 NONE -----
```

7.3 Eccentricities

*SITE	PT	SOLN	T	DATA_START	DATA_END	AXE	UP	NORTH	EAST
							ARP->	BENCHMARK(M)	
ACDR	A	1	P	26:06:00000	26:06:86370	UNE	3.0460	0.0000	0.0000
ALDA	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
ALSA	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
AMUR	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
BIDA	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
BRZR	A	1	P	26:06:00000	26:06:86370	UNE	0.0771	0.0000	0.0000
CACE	A	1	P	26:06:00000	26:06:86370	UNE	0.0600	0.0000	0.0000
CANT	A	1	P	26:06:00000	26:06:86370	UNE	3.0490	0.0000	0.0000
CREU	A	1	P	26:06:00000	26:06:86370	UNE	0.0770	0.0000	0.0000
EBRE	A	1	P	26:06:00000	26:06:86370	UNE	0.0770	0.0000	0.0000
ELGE	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
EMAZ	A	1	P	26:06:00000	26:06:86370	UNE	0.0350	0.0000	0.0000
GERN	A	1	P	26:06:00000	26:06:86370	UNE	0.0771	0.0000	0.0000
HOND	A	1	P	26:06:00000	26:06:86370	UNE	0.0771	0.0000	0.0000
IGEL	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
ISPS	A	1	P	26:06:00000	26:06:86370	UNE	0.0350	0.0000	0.0000
KAST	A	1	P	26:06:00000	26:06:86370	UNE	0.0350	0.0000	0.0000
LARE	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
LAZK	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
LEIT	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
ORDN	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
PAS2	A	1	P	26:06:10000	26:06:86370	UNE	0.0000	0.0000	0.0000
PASA	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
RID1	A	1	P	26:06:00000	26:06:86370	UNE	0.0606	0.0000	0.0000
SALA	A	1	P	26:06:00000	26:06:86370	UNE	0.0600	0.0000	0.0000
SCDA	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
SOPU	A	1	P	26:06:00000	26:06:86370	UNE	0.0771	0.0000	0.0000
TERU	A	1	P	26:06:00000	26:06:86370	UNE	0.0600	0.0000	0.0000
VITO	A	1	P	26:06:00000	26:06:86370	UNE	0.0000	0.0000	0.0000
YEBE	A	1	P	26:06:00000	26:06:86370	UNE	0.0600	0.0000	0.0000
ZARA	A	1	P	26:06:00000	26:06:86370	UNE	3.2590	0.0000	0.0000

8 Inconsistencies (logsheet-RINEX metadata)

The following inconsistencies were found comparing the data available in the logsheets and the RINEX headers:

2026-03-23 13:06 UTC	ALDA0600.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: alda00esp_20241008.log
2026-03-23 15:57 UTC	ALDA0610.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: alda00esp_20241008.log
2026-03-23 18:48 UTC	ALDA0620.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: alda00esp_20241008.log
2026-03-23 22:10 UTC	ALDA0630.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: alda00esp_20241008.log
2026-03-24 03:09 UTC	ALDA0640.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: alda00esp_20241008.log
2026-03-24 05:56 UTC	ALDA0650.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: alda00esp_20241008.log
2026-03-24 08:49 UTC	ALDA0660.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: alda00esp_20241008.log
2026-03-23 13:06 UTC	AMUR0600.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amur00esp_20241008.log
2026-03-23 15:57 UTC	AMUR0610.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amur00esp_20241008.log
2026-03-23 18:48 UTC	AMUR0620.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amur00esp_20241008.log
2026-03-23 22:10 UTC	AMUR0630.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amur00esp_20241008.log
2026-03-24 03:09 UTC	AMUR0640.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amur00esp_20241008.log
2026-03-24 05:56 UTC	AMUR0650.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amur00esp_20241008.log
2026-03-24 08:49 UTC	AMUR0660.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amur00esp_20241008.log
2026-03-23 13:06 UTC	BIDA0600.260	RECEIVER TYPE	LEICA GR30	->	LEICA GR10	(source: bida_20200626.log
2026-03-23 13:06 UTC	BIDA0600.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.52/6.525	(source: bida_20200626.log
2026-03-23 15:57 UTC	BIDA0610.260	RECEIVER TYPE	LEICA GR30	->	LEICA GR10	(source: bida_20200626.log
2026-03-23 15:57 UTC	BIDA0610.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.52/6.525	(source: bida_20200626.log
2026-03-23 18:48 UTC	BIDA0620.260	RECEIVER TYPE	LEICA GR30	->	LEICA GR10	(source: bida_20200626.log
2026-03-23 18:48 UTC	BIDA0620.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.52/6.525	(source: bida_20200626.log
2026-03-23 22:10 UTC	BIDA0630.260	RECEIVER TYPE	LEICA GR30	->	LEICA GR10	(source: bida_20200626.log
2026-03-23 22:10 UTC	BIDA0630.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.52/6.525	(source: bida_20200626.log
2026-03-24 03:09 UTC	BIDA0640.260	RECEIVER TYPE	LEICA GR30	->	LEICA GR10	(source: bida_20200626.log
2026-03-24 03:09 UTC	BIDA0640.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.52/6.525	(source: bida_20200626.log
2026-03-24 05:56 UTC	BIDA0650.260	RECEIVER TYPE	LEICA GR30	->	LEICA GR10	(source: bida_20200626.log
2026-03-24 05:56 UTC	BIDA0650.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.52/6.525	(source: bida_20200626.log
2026-03-24 08:49 UTC	BIDA0660.260	RECEIVER TYPE	LEICA GR30	->	LEICA GR10	(source: bida_20200626.log
2026-03-24 08:49 UTC	BIDA0660.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.52/6.525	(source: bida_20200626.log
2026-03-23 13:06 UTC	BRZR0600.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: brzr00esp_20240315.log
2026-03-23 15:57 UTC	BRZR0610.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: brzr00esp_20240315.log
2026-03-23 18:48 UTC	BRZR0620.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: brzr00esp_20240315.log
2026-03-23 22:10 UTC	BRZR0630.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: brzr00esp_20240315.log
2026-03-24 03:09 UTC	BRZR0640.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: brzr00esp_20240315.log
2026-03-24 05:56 UTC	BRZR0650.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: brzr00esp_20240315.log
2026-03-24 08:49 UTC	BRZR0660.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: brzr00esp_20240315.log
2026-03-23 13:06 UTC	CANT0600.260	RECEIVER TYPE	LEICA GR10	->	LEICA GR50	(source: cant00esp_20250624.log
2026-03-23 13:06 UTC	CANT0600.260	RECEIVER FIRM. VERS.	4.00/6.713	->	4.80/7.900	(source: cant00esp_20250624.log
2026-03-23 15:57 UTC	CANT0610.260	RECEIVER TYPE	LEICA GR10	->	LEICA GR50	(source: cant00esp_20250624.log
2026-03-23 15:57 UTC	CANT0610.260	RECEIVER FIRM. VERS.	4.00/6.713	->	4.80/7.900	(source: cant00esp_20250624.log
2026-03-23 18:48 UTC	CANT0620.260	RECEIVER TYPE	LEICA GR10	->	LEICA GR50	(source: cant00esp_20250624.log
2026-03-23 18:48 UTC	CANT0620.260	RECEIVER FIRM. VERS.	4.00/6.713	->	4.80/7.900	(source: cant00esp_20250624.log
2026-03-23 22:10 UTC	CANT0630.260	RECEIVER TYPE	LEICA GR10	->	LEICA GR50	(source: cant00esp_20250624.log
2026-03-23 22:10 UTC	CANT0630.260	RECEIVER FIRM. VERS.	4.00/6.713	->	4.80/7.900	(source: cant00esp_20250624.log
2026-03-24 03:09 UTC	CANT0640.260	RECEIVER TYPE	LEICA GR10	->	LEICA GR50	(source: cant00esp_20250624.log
2026-03-24 03:09 UTC	CANT0640.260	RECEIVER FIRM. VERS.	4.00/6.713	->	4.80/7.900	(source: cant00esp_20250624.log
2026-03-24 05:56 UTC	CANT0650.260	RECEIVER TYPE	LEICA GR10	->	LEICA GR50	(source: cant00esp_20250624.log
2026-03-24 05:56 UTC	CANT0650.260	RECEIVER FIRM. VERS.	4.00/6.713	->	4.80/7.900	(source: cant00esp_20250624.log
2026-03-24 08:49 UTC	CANT0660.260	RECEIVER TYPE	LEICA GR10	->	LEICA GR50	(source: cant00esp_20250624.log
2026-03-24 08:49 UTC	CANT0660.260	RECEIVER FIRM. VERS.	4.00/6.713	->	4.80/7.900	(source: cant00esp_20250624.log
2026-03-23 13:06 UTC	EMAZ0600.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amaz00esp_20241008.log
2026-03-23 15:57 UTC	EMAZ0610.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amaz00esp_20241008.log
2026-03-23 18:48 UTC	EMAZ0620.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amaz00esp_20241008.log
2026-03-23 22:10 UTC	EMAZ0630.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amaz00esp_20241008.log
2026-03-24 03:09 UTC	EMAZ0640.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amaz00esp_20241008.log
2026-03-24 05:56 UTC	EMAZ0650.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amaz00esp_20241008.log
2026-03-24 08:50 UTC	EMAZ0660.260	RECEIVER FIRM. VERS.	4.83/7.900	->	4.80/7.900	(source: amaz00esp_20241008.log
2026-03-23 13:06 UTC	ISPS0600.260	ANTENNA SER. NO.		->	24238009	(source: isps00esp_20250114.log
2026-03-23 15:57 UTC	ISPS0610.260	ANTENNA SER. NO.		->	24238009	(source: isps00esp_20250114.log
2026-03-23 18:48 UTC	ISPS0620.260	ANTENNA SER. NO.		->	24238009	(source: isps00esp_20250114.log
2026-03-23 22:10 UTC	ISPS0630.260	ANTENNA SER. NO.		->	24238009	(source: isps00esp_20250114.log
2026-03-24 03:09 UTC	ISPS0640.260	ANTENNA SER. NO.		->	24238009	(source: isps00esp_20250114.log
2026-03-24 05:56 UTC	ISPS0650.260	ANTENNA SER. NO.		->	24238009	(source: isps00esp_20250114.log

```
2026-03-24 08:50 UTC | ISPS0660.260 | ANTENNA SER. NO. | -> 24238009 (source: isps00esp_20250114.log
2026-03-23 13:06 UTC | KAST0600.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: kast00esp_20241008.log
2026-03-23 15:57 UTC | KAST0610.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: kast00esp_20241008.log
2026-03-23 18:48 UTC | KAST0620.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: kast00esp_20241008.log
2026-03-23 22:10 UTC | KAST0630.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: kast00esp_20241008.log
2026-03-24 03:09 UTC | KAST0640.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: kast00esp_20241008.log
2026-03-24 05:56 UTC | KAST0650.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: kast00esp_20241008.log
2026-03-24 08:50 UTC | KAST0660.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: kast00esp_20241008.log
2026-03-23 13:06 UTC | VITO0600.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: vito00esp_20241008.log
2026-03-23 15:57 UTC | VITO0610.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: vito00esp_20241008.log
2026-03-23 18:48 UTC | VITO0620.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: vito00esp_20241008.log
2026-03-23 22:11 UTC | VITO0630.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: vito00esp_20241008.log
2026-03-24 03:09 UTC | VITO0640.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: vito00esp_20241008.log
2026-03-24 05:56 UTC | VITO0650.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: vito00esp_20241008.log
2026-03-24 08:50 UTC | VITO0660.260 | RECEIVER FIRM. VERS. | 4.83/7.900 -> 4.80/7.900 (source: vito00esp_20241008.log
```

9 References

C. Boucher and Z. Altamimi (2011): *Specifications for reference frame fixing in the analysis of a EUREF GPS campaign*. etrs89.ensg.ign.fr/memo-V8.pdf



EPN Coordination Group and the EPN Central Bureau (2018): *Guidelines for the EPN Analysis Centres*. epncb.oma.be/documentation/guidelines/guidelines_analysis_centres.pdf


Johnston, G., Riddell, A., Hausler, G. (2017). The International GNSS Service. Teunissen, Peter J.G., Montenbruck, O. (Eds.), Springer Handbook of Global Navigation Satellite Systems (1st ed., pp. 967-982). Cham, Switzerland: Springer International Publishing. DOI: 10.1007/978-3-319-42928-1

Z. Altamimi (2018): *EUREF Technical Note 1: Relationship and Transformation between the International and the European Terrestrial Reference Systems*. etrs89.ensg.ign.fr/pub/EUREF-TN-1.pdf


10 Cumulative Time Series

Time series of stations. Latest plots at: <http://geolabpasaia.org/gnss/ARA-net/TSeries/>, or click on the caption of each image.

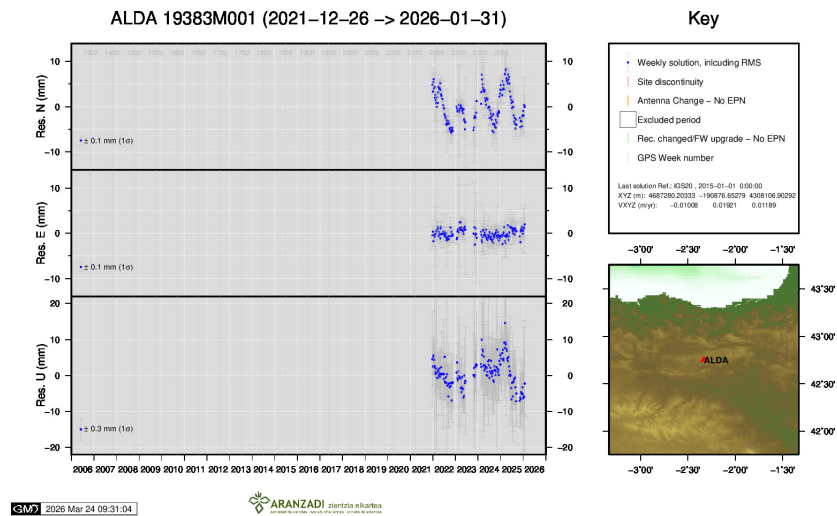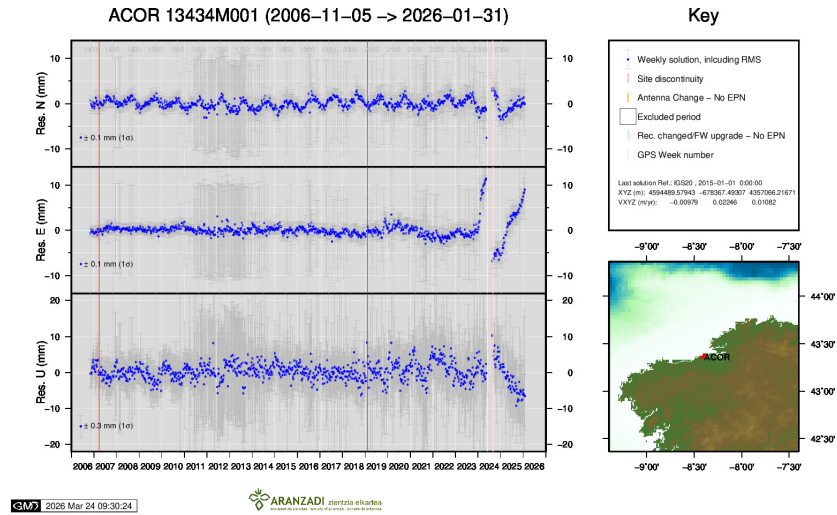


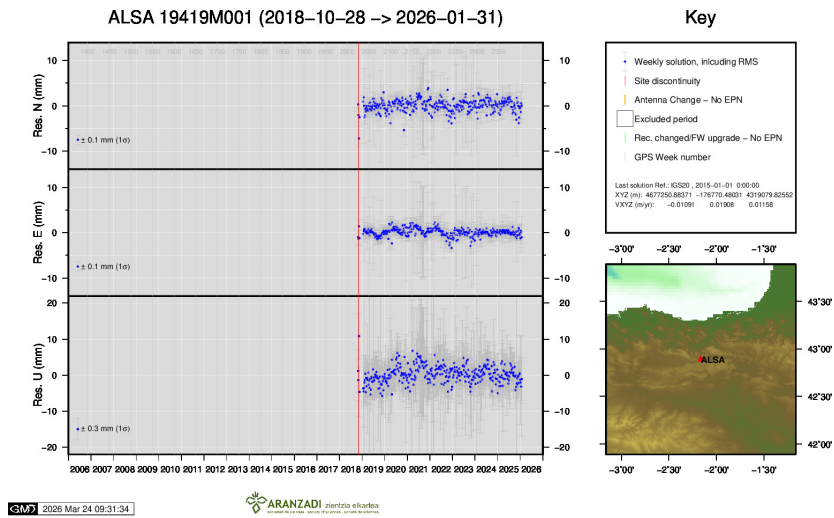


3) ALSA

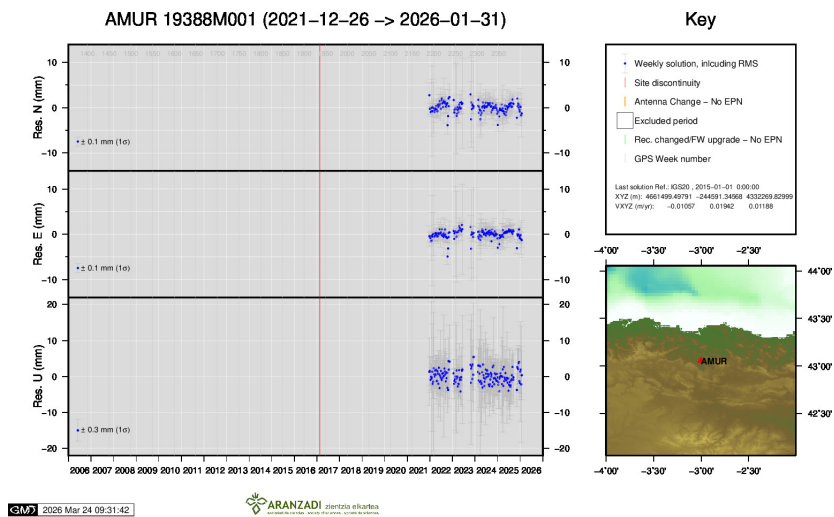


4) AMUR

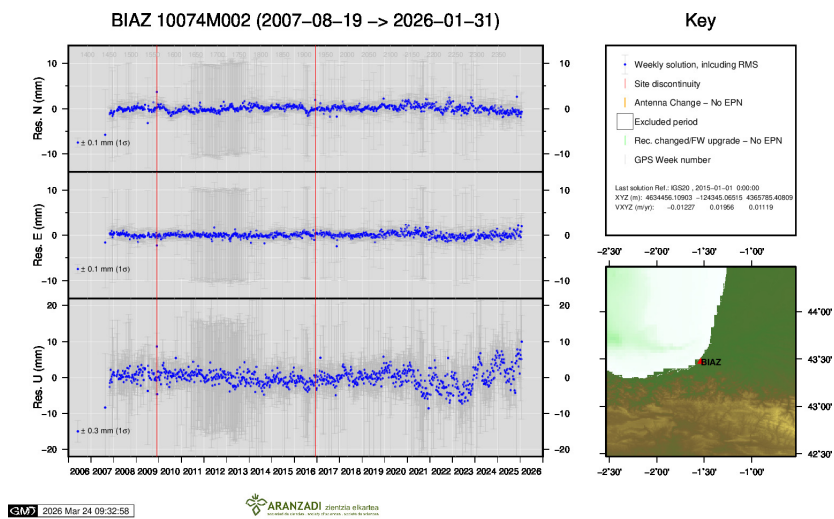


5) BIAZ

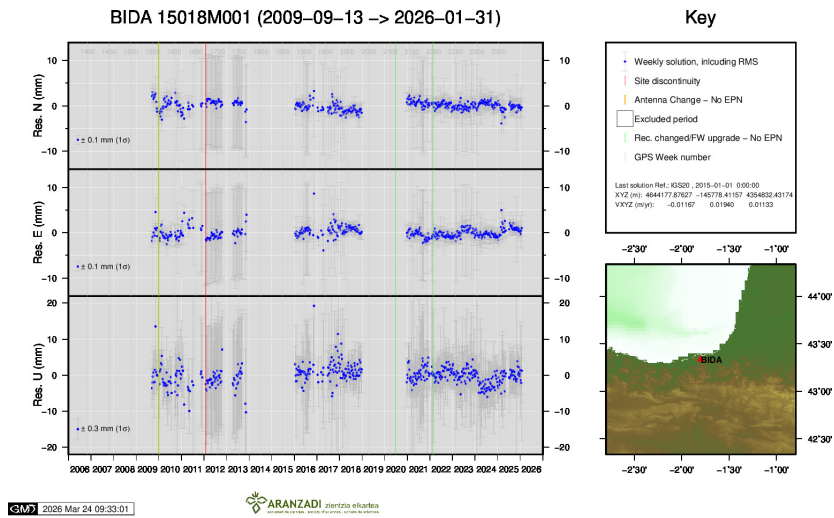


6) BIDA

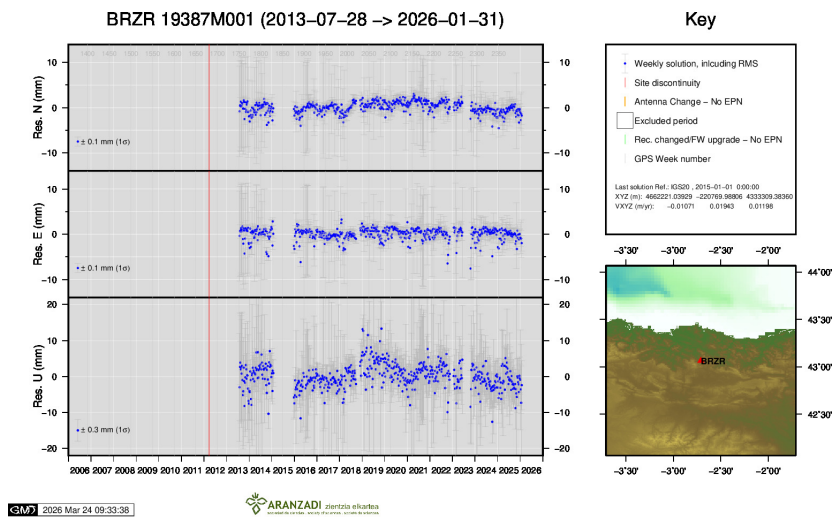


7) BRZR

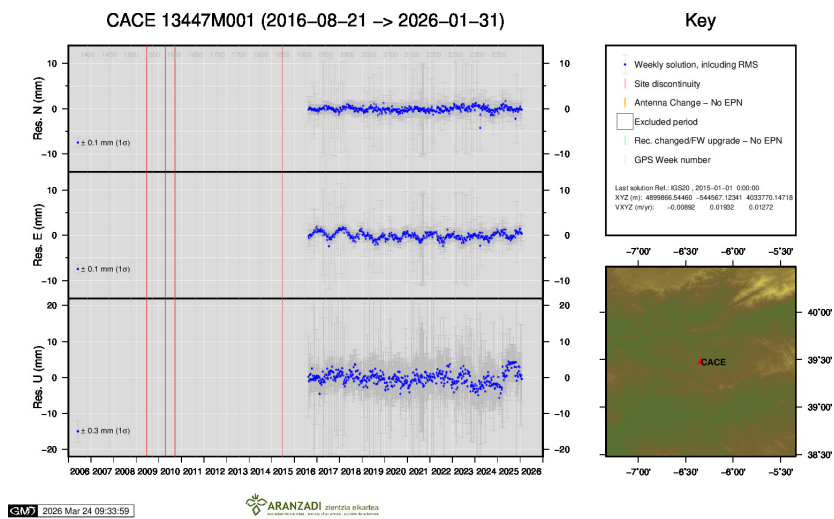


8) CACE

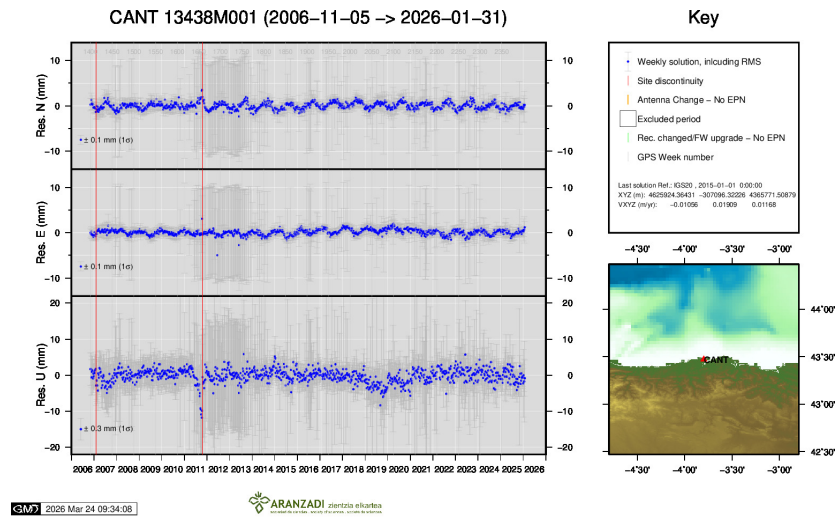


9) CANT

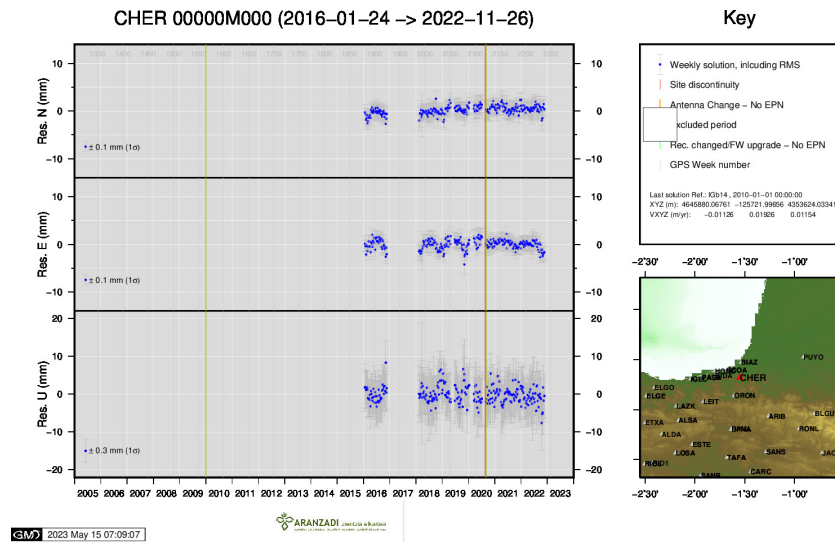


10) CHER

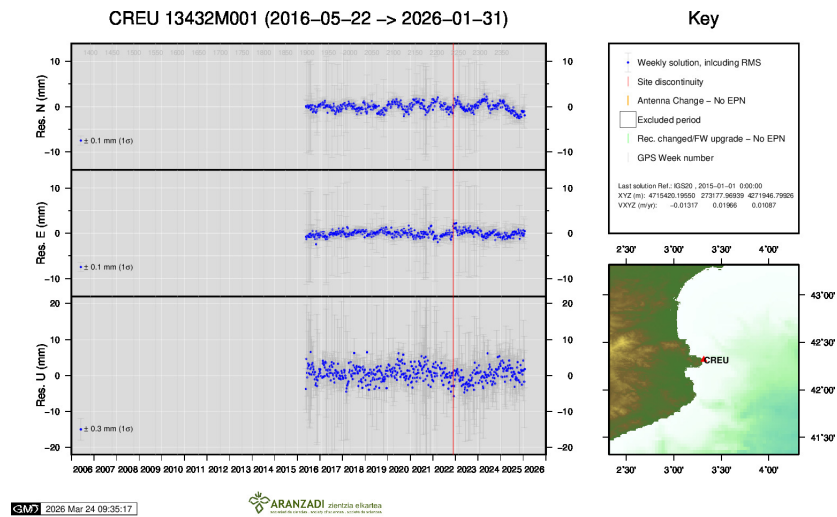


11) CREU

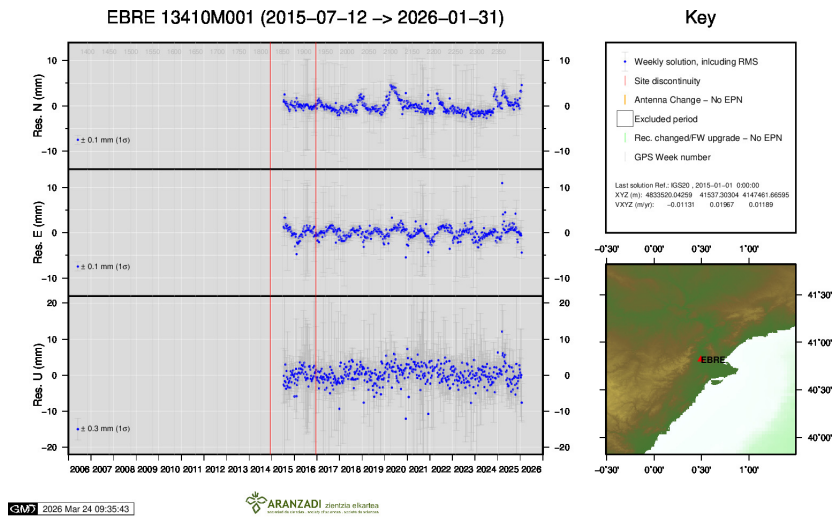


12) EBRE

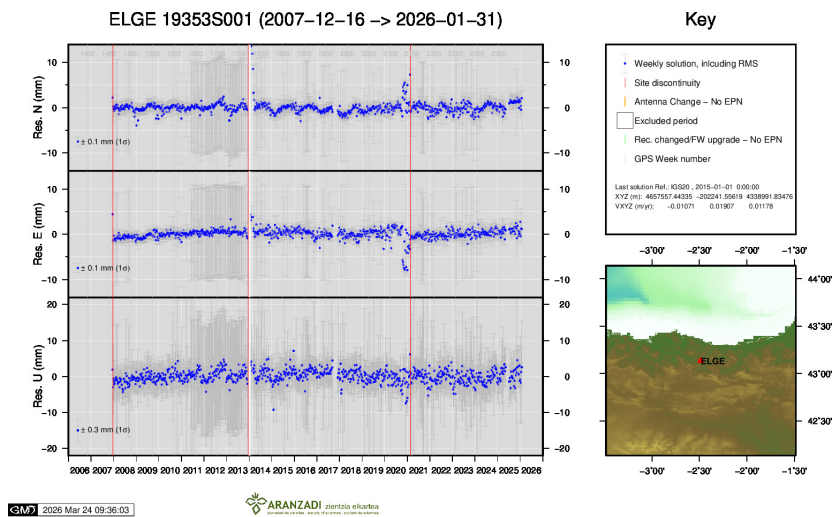


13) ELGE

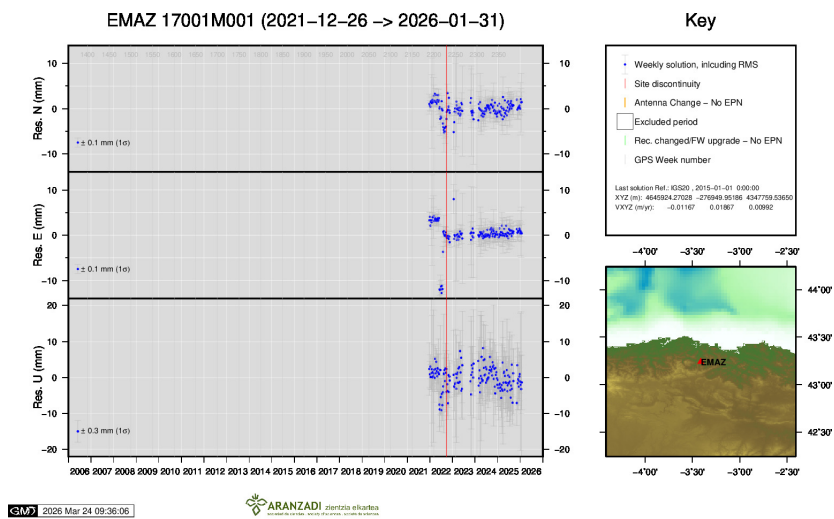


14) EMAZ

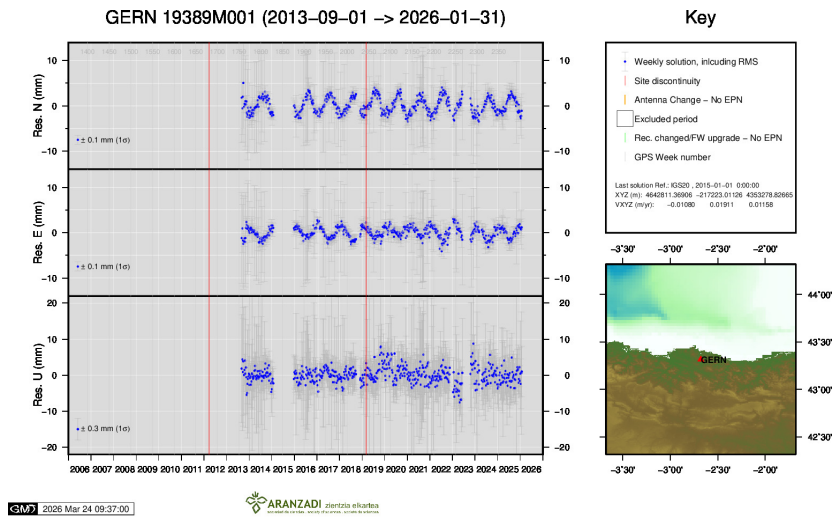


15) GERN

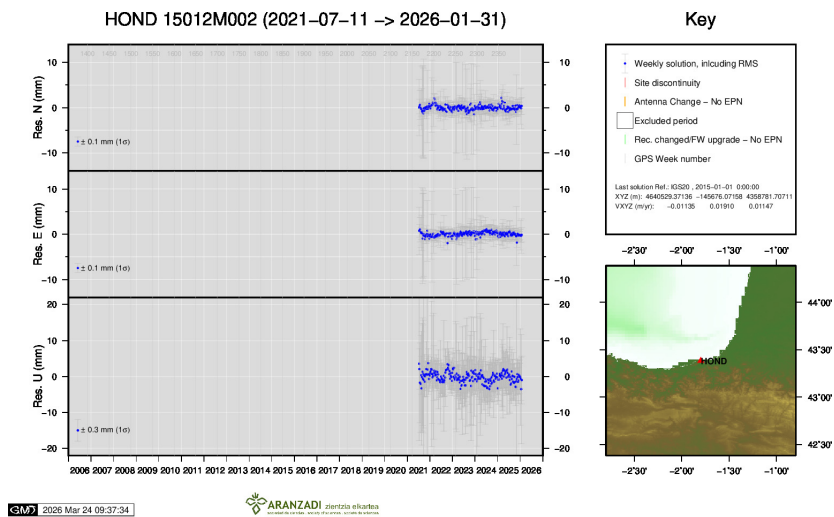


16) HOND

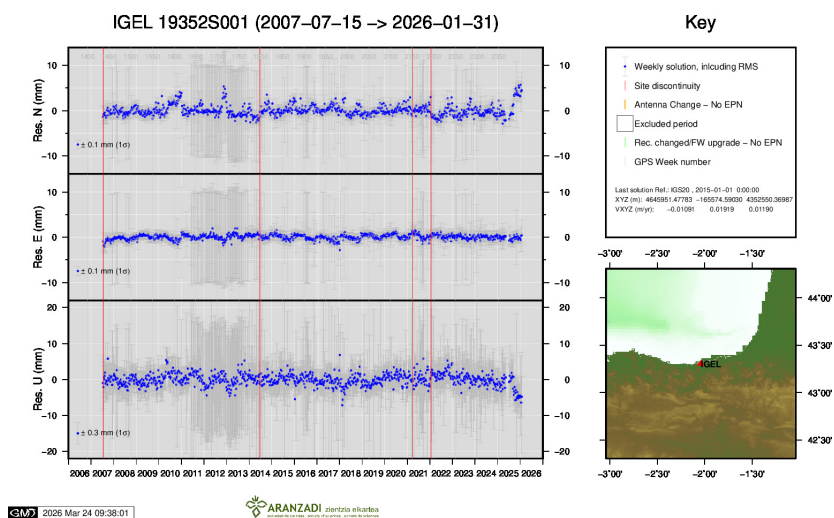


17) IGEL

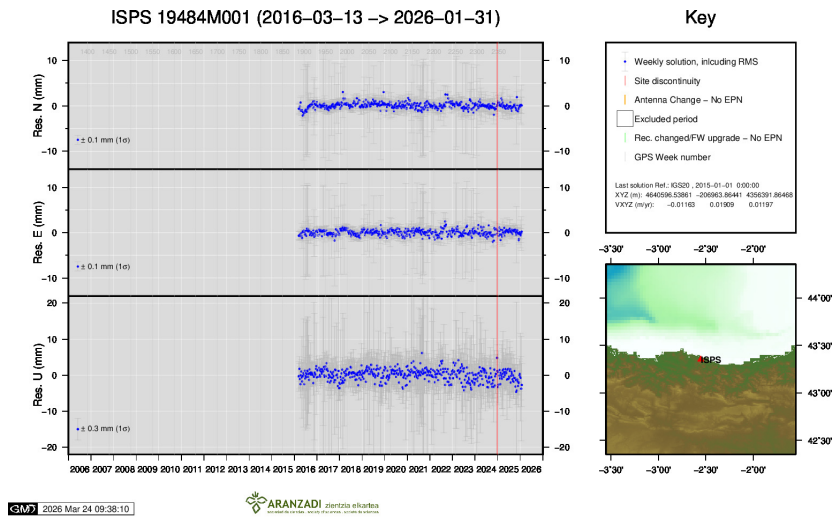




18) ISPS



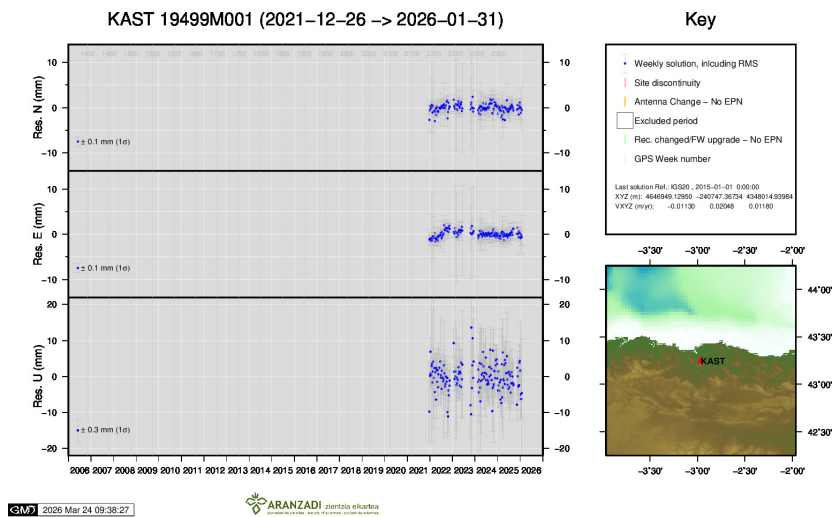





19) KAST

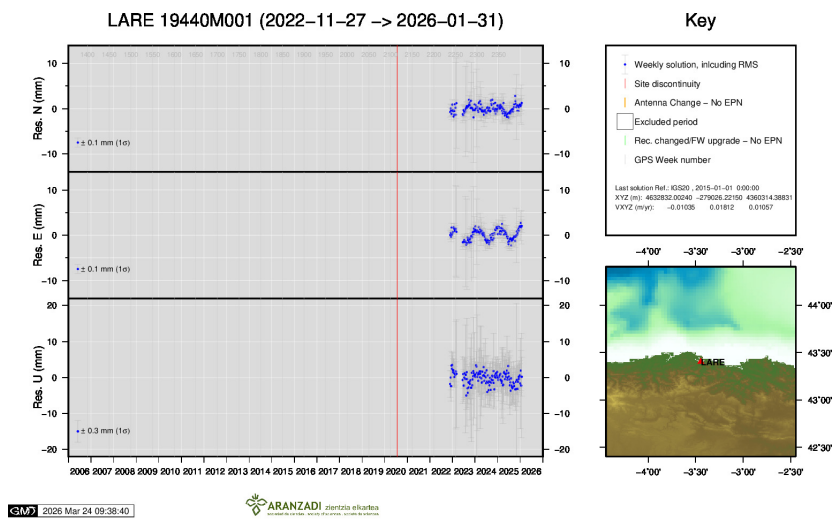


20) LARE

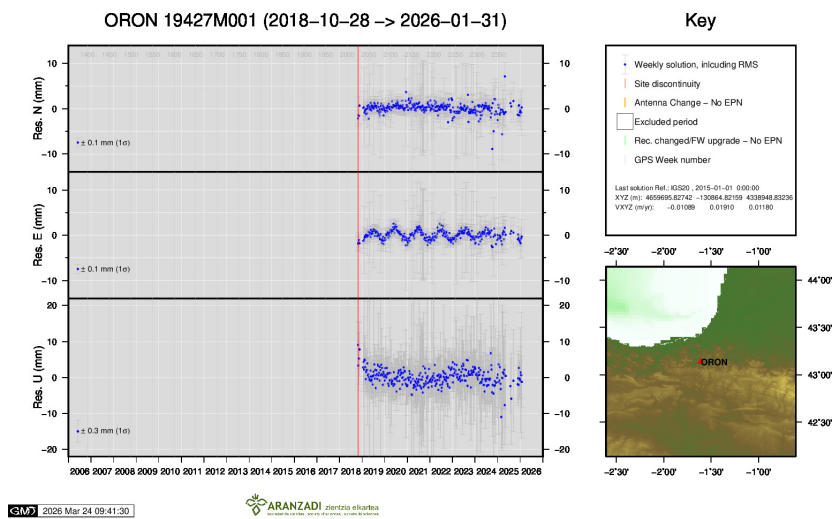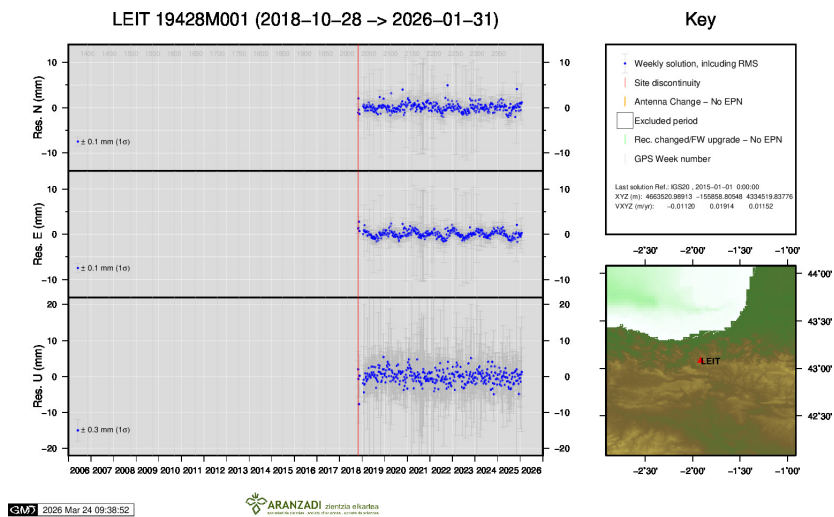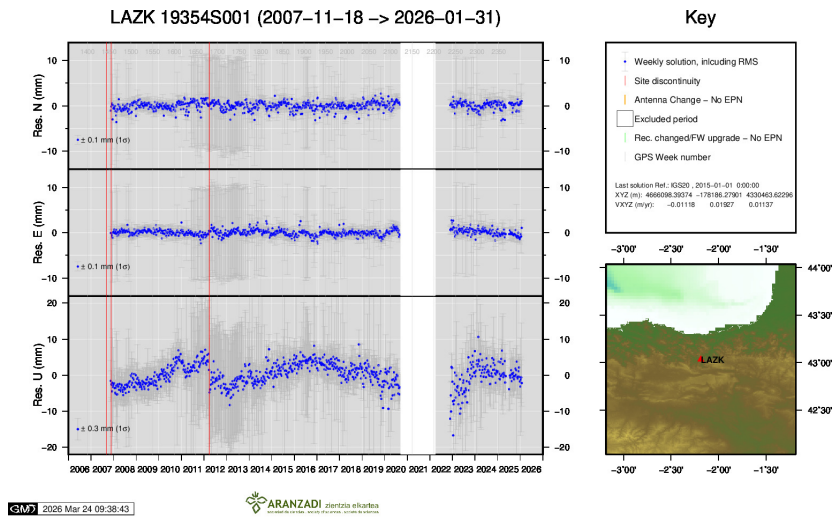


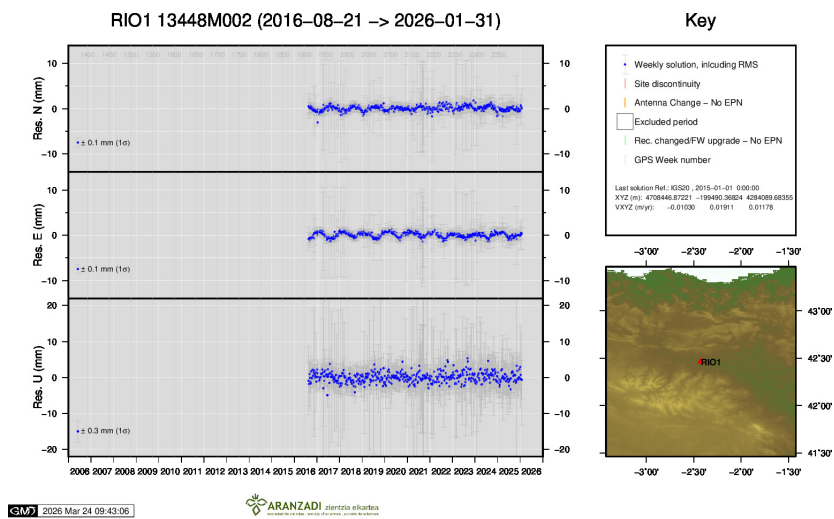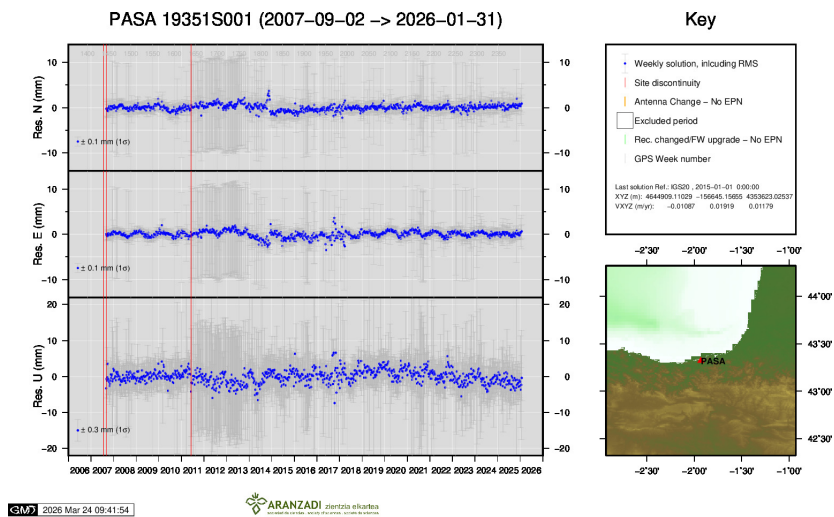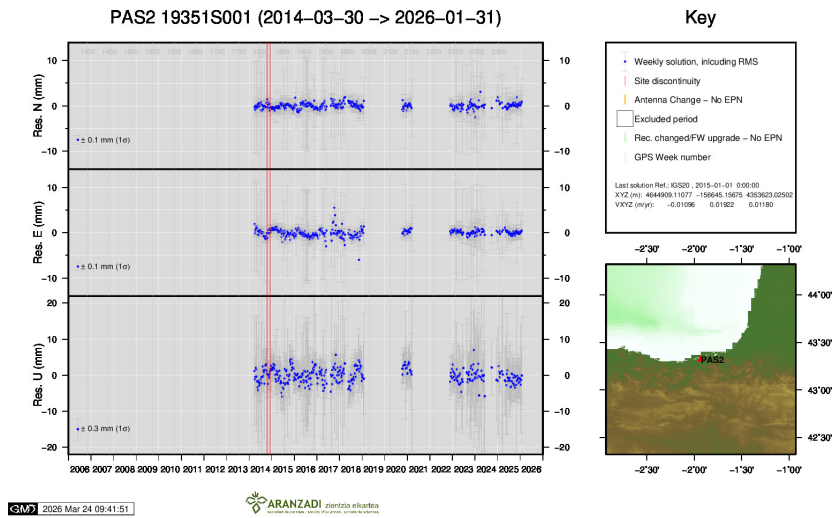

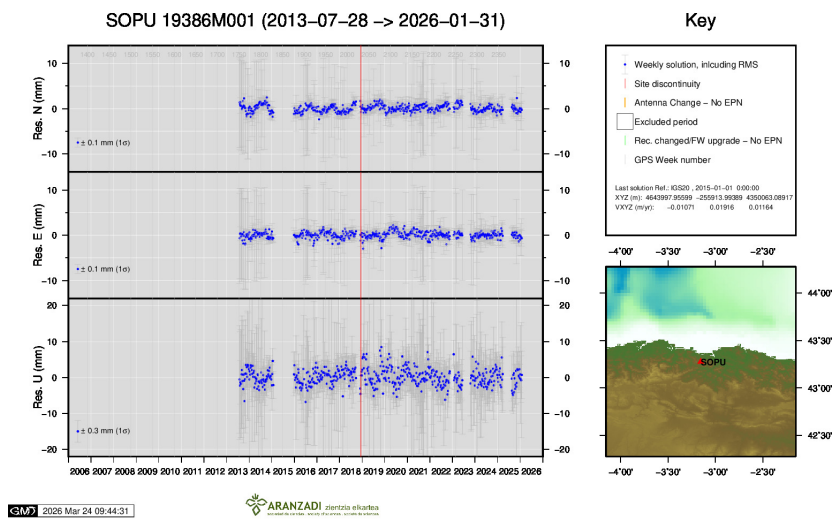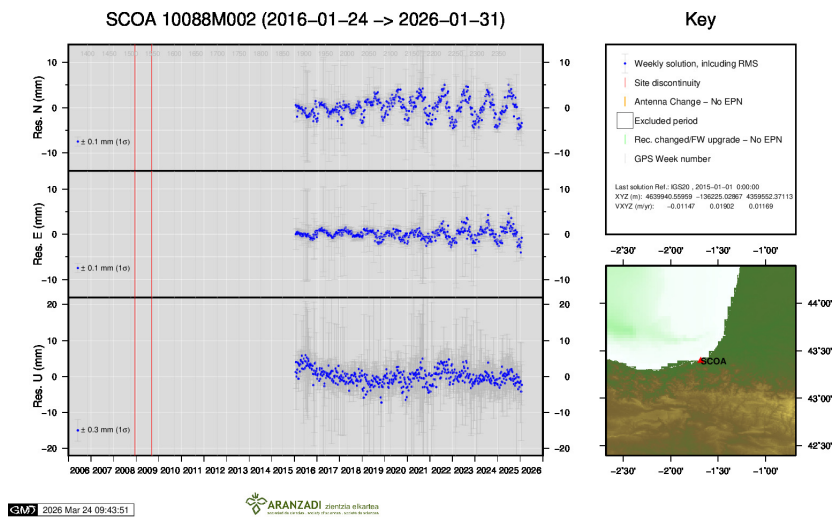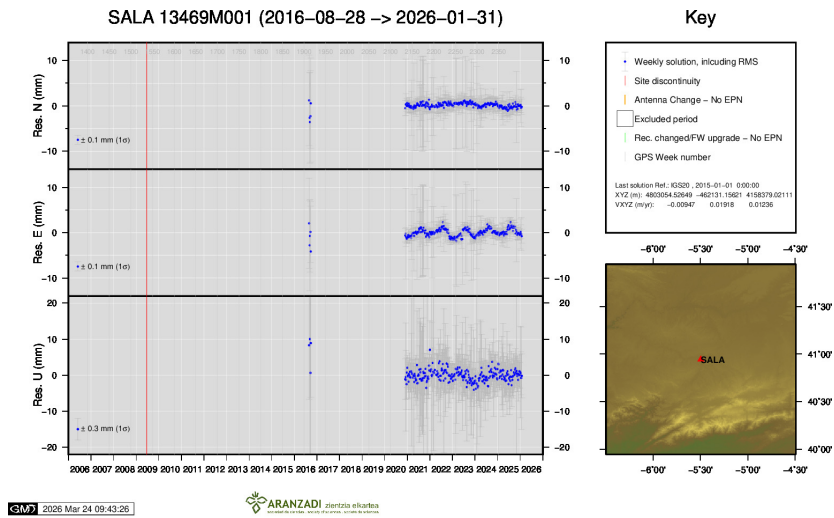


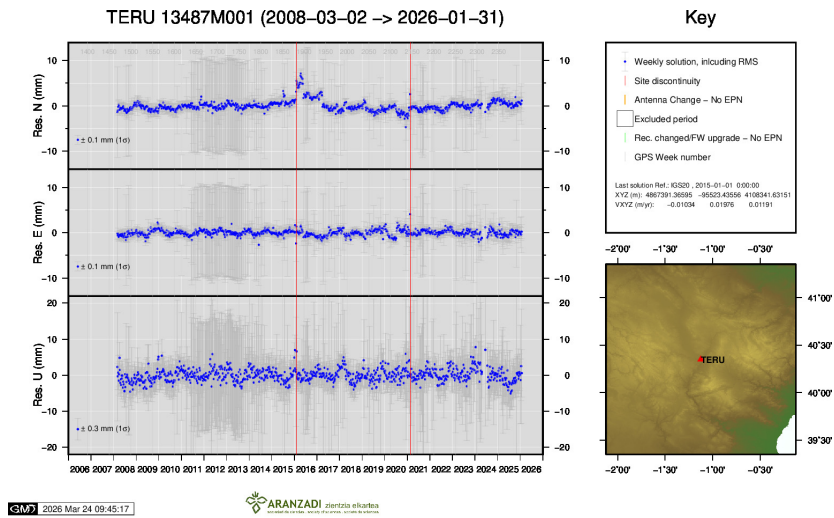

30) TERU

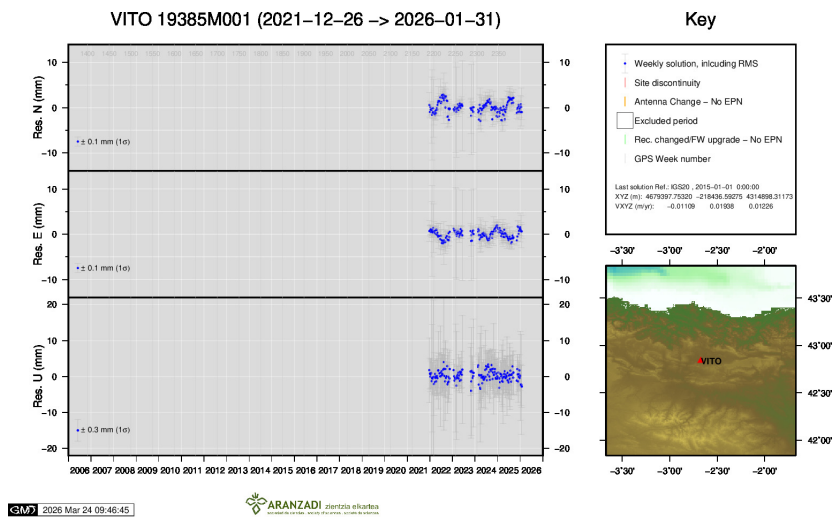

31) VITO

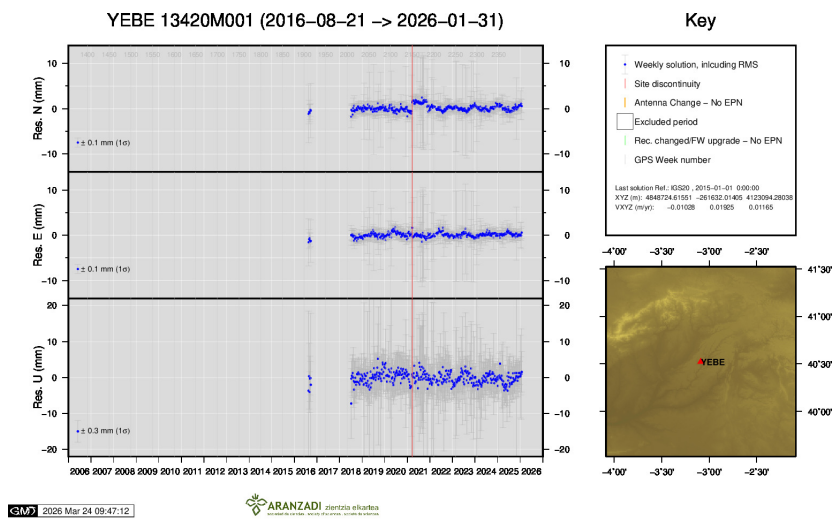

32) YEBE

